



GA10K3A1AM SERIES VI THERMISTORS

2.2 to 10K Ohms Resistance @25°C
Thermally Conductive Epoxy Coating
Ø 2.4 mm Maximum Diameter
32 AWG Alloy 180 Leads
RoHS Compliant

BetaCURVE series VI thermistors are small epoxy coated devices with solid tin plated lead wires. The series VI are specified with a temperature tolerance of +/-0.05°C over the range from +32°C to +44°C and are available in different nominal resistance values.


FEATURES

- Interchangeability
- Proven stability and reliability
- Rapid time response
- Alloy lead wires for reduced thermal conductivity ("stem effect")
- Thermally conductive epoxy coating
- Temperature range -40°C to +125°C
- Medical grade classification
- Custom probe assemblies available

APPLICATIONS

- Temperature sensing, control and compensation
- Tight tolerance instrumentation
- Esophageal catheters
- Skin sensors
- Oral and rectal probes
- Pharmaceutical manufacturing equipment
- Temperature sensing, control and compensation

MECHANICAL DETAILS

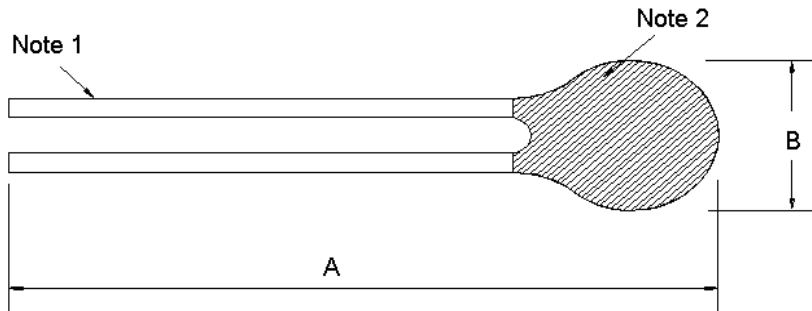

DIMENSIONS

A	B
76 ±2 mm	2.4 mm max.

Note 1: 32 AWG Solid Alloy 180 Leads

Note 2: Yellow Stycast 2850ft Epoxy

PERFORMANCE SPECS

Parameters	Units	Value
Nominal Resistance at +25°C	Ohms	10,000
Resistance Tolerance from +32°C to +44°C	°C	0.05
Alpha Value at +25°C	%/°C	4.39
Beta Value 25/85	K	3976
Tolerance on Beta Value 25/85	%	0.32
Time Response in Liquids	Seconds	<1
Dissipation Constant in Still Air	mW/°C	0.75

RESISTANCE V TEMPERATURE TABLE

Temp. °C	Ohms
-40	336098
-39	314553
-38	294524
-37	275897
-36	258563
-35	242427
-34	227398
-33	213394
-32	200339
-31	188163
-30	176803
-29	166198
-28	156294
-27	147042
-26	138393
-25	130306
-24	122741
-23	115661
-22	109032
-21	102824
-20	97006
-19	91553
-18	86439
-17	81641
-16	77138
-15	72911
-14	68940
-13	65209
-12	61703
-11	58405
-10	55304
-9	52385
-8	49638
-7	47050
-6	44613
-5	42317
-4	40151
-3	38110
-2	36184
-1	34366
0	32651
1	31031
2	29500

Temp. °C	Ohms
3	28054
4	26687
5	25395
6	24172
7	23016
8	21921
9	20885
10	19903
11	18973
12	18092
13	17257
14	16465
15	15714
16	15001
17	14324
18	13682
19	13073
20	12493
21	11943
22	11420
23	10923
24	10450
25	10000
26	9572
27	9165
28	8777
29	8408
30	8056
31	7721
32	7402
33	7097
34	6807
35	6530
36	6266
37	6014
38	5774
39	5544
40	5325
41	5116
42	4916
43	4724
44	4542
45	4367

Temp. °C	Ohms
46	4200
47	4040
48	3887
49	3741
50	3601
51	3467
52	3339
53	3216
54	3098
55	2985
56	2877
57	2773
58	2674
59	2579
60	2487
61	2399
62	2315
63	2234
64	2157
65	2082
66	2011
67	1942
68	1876
69	1813
70	1752
71	1693
72	1637
73	1582
74	1530
75	1480
76	1432
77	1385
78	1341
79	1298
80	1256
81	1216
82	1178
83	1141
88	974
89	945
90	916
91	888
92	862

Temp. °C	Ohms
93	836
94	811
95	787
96	764
97	741
98	720
99	699
100	678
101	659
102	640
103	622
104	604
105	587
106	571
107	555
108	539
109	524
110	510
111	496
112	482
113	469
114	457
115	444
116	432
117	421
118	410
119	399
120	388
121	378
122	368
123	359
124	350
125	341

GA10K3A1AM SERIES VI THERMISTORS

ORDERING INFORMATION

Part Number	Description	Ω @25°C	MOQ*
GA10K3A1AM	Series VI thermistor	10,000	1,000

* For quantities less than MOQ (Minimum Order Quantity) contact distribution

NORTH AMERICA
Tel +1 800 522 6752
customercare.ando@te.com

EUROPE
Tel +31 73 624 6999
customercare.glw@te.com

ASIA
Tel +86 0400 820 6015
customercare.chdu@te.com

te.com/sensorsolutions

BetaCURVE, TE Connectivity, TE, and the TE Connectivity (logo) are trademarks of the TE Connectivity Ltd. family of companies. Other logos, products and/or company names referred to herein may be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2018 TE Connectivity Ltd. family of companies All Rights Reserved.